

AUTHORIZED BUSINESS PARTNER



JOMOO Bathroom & Kitchen Fittings, MERIH Lift, hyh Hardware Fittings



Start Your Smart Life...

Marketing By



Building Invention Limited

a concern of Electromech Engineering

www.jomoogroup.com
www.merihassansor.com
www.china-hyh.com

A WORLD-CLASS BRAND

JOMOO is a leading brand of kitchen and bathroom that integrates R&D, manufacture, sales and service. Today, JOMOO has entered more than 120 countries, and gained the attention of many authoritative design awards.

By adhering to the concept of "Start Your Smart Life" and taking innovation as the driving force, JOMOO has built a long-term cooperation with the world-know technology com-panies and prestigious European design studios, to offer consumers integrated kitchen & bathroom solutions and create a smart & healthy lifestyle.

GLOBAL PRESENCE

120+ COUNTRIES / REGIONS
5,000+ HIGH-END SHOWROOMS
200,000+ SALES OUTLETS




GLOBAL DELIVERY

INTERNATIONAL WAREHOUSE
GLOBAL SUPPLY CHAIN



INNOVATION NEVER STOPS

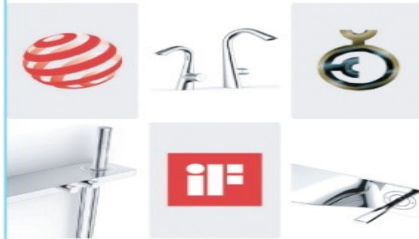

Innovation is always at the heart of strategy in JOMOO. We invest more than 5% of sales revenue in research and development yearly and have been awarded numbers of global leading design awards.

Such achievements are supported by our R&D capabilities. We own 30 research institutes, 60+ transformation centers European Operations Center and North American Operations Center, more than 5000 patents and a team of over 2000 professionals.



POWERFUL PARTNERSHIP

COLLECT GLOBAL TOP RESOURCES
TO MOTIVATE CROSSOVER INNOVATION

We have integrated the most advanced resources including products, design, technology, marketing and management and built long-term strategic partnerships with top class global teams, like Siemens, IBM, Huawei, Giugiaro Design, Porsche Design, etc.



STRATEGIC PARTNERS



Start Your Smart Life...

MARVELOUS DESIGN



JOMOO is a member of the German Design Council, and a winner of many world-leading authoritative design awards. Depending on extraordinary quality and world's leading design concept, JOMOO has won **39** if Design Awards, **21** Red Dot Design Awards, **5** German Design Awards, **3** Good Design Awards, **2** German Innovation Awards, **2** German ICONIC Awards, etc.



JOMOO GLOBAL PROJECTS


JOMOO is the exclusive sanitary ware supplier of Beijing National Stadium (the "Bird's Nest") and the supplier of Beijing Daxing International Airport. Nowadays, JOMOO has cooperated with more than 10,000 construction projects all around the world, including international five-star hotels, tourist resorts, international competition venues, and global landmarks.



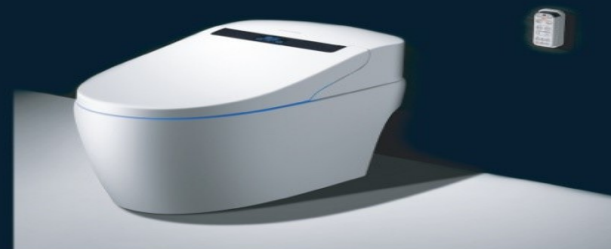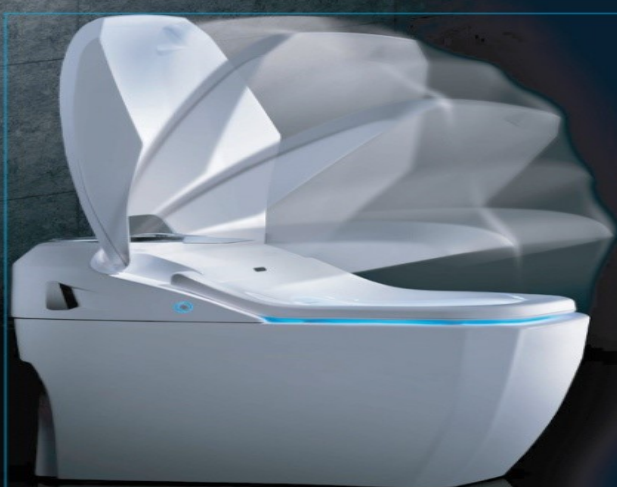

| INTELLIGENT TOILET


Product model		Z1D7610-SA-IDO305	Z1D6800-S2-CJM305	Z1D7660-SA-IDO305
Picture				
Color		Champagne	Champagne	White
Shifter		305/400 Optional	305/400 Optional	305/400 Optional
Size	Length	666	730	670
	Width	407	407	407
	Height	504	486	515
Function		• with		
F u n c t i o n	Voice & gesture control			
	APP control			
	Side fixed control			
	Remote Control	•		•
	Magnetic wireless charging			•
	Hip wash	•	•	•
	Bidet	•	•	•
	Hip nursing			
	Female nursing			
	Mixed air washing	•	•	•
	Warm air	•	•	•
	Auto deodorization	•	• (catalyst)	
	Oscillating wash			
	Seat heating			
	Seat sensor			
	Anti-microbial Seat		•	
	Nozzle anti-microbial	•	•	•
	Nozzle self-cleaning	•	•	•
	Nozzle washable	•	•	•
	Quietly soft-close cover	•	•	•
	Smart power saving	•		•
	Soft night lighting	5-gear	• (photosensitive)	5-gear
	Automatic flip			
	Remote flip			
	Foot-induction flip			
	Auto flushing	•	•	•
	Nozzle position adjustment	5-gear	5-gear	5-gear
	Water temperature adjustment	5-gear	5-gear	5-gear
	Air temperature adjustment	5-gear	5-gear	5-gear
	Seat temperature adjustment	5-gear	5-gear	5-gear
	Water-pressure adjustment	5-gear	5-gear	5-gear
	22H automatic water change			
	Filter	•	•	•
	Heating method	Instant heating	Instant heating	Instant heating
	Seat cover material	PP	PP	PP
	Spray lance material	Stainless steel	Stainless steel	Stainless steel
	Spray head material	ABS	ABS	ABS
	Music play			
	Negative ion purification			
	Electrolysed antibacterial water			
	Ultraviolet disinfection	•	•	
	Pre-wet technology		•	
	The 2nd Generation Self-cleaning Glass	•	•	•
	One button auto operation	•	•	•
	Water consumption	6L	4.2/6L	6L
	Water efficiency rating	2nd	2nd	2nd
	Plug	CN plug	CN plug	CN plug



Z1D6800-S2-CJM305
Intelligence toilet
Standard Configuration :
730*407*486mm
S-Trap
Rough-in: 305mm
IP




Z1D7660-SA-IDO305
Intelligence toilet
670*407*515mm
S-Trap
Rough-in: 305mm
SN




Z1D7610-SA-IDO305
Intelligence toilet
666*407*498mm
S-Trap
Rough-in: 305mm
SN



Z1D1816J-S0-CJM1
Intelligence toilet cover
Standard Configuration :
520*468*128mm
IP



Z1D1813-S0-IDO1
Intelligence toilet cover
520*468*128mm
IP



Z1D1016D-S0-IDO1
Intelligence toilet cover
533*459*143mm
IP







11222-2-2/11Z-1

Two-piece toilet

Standard Configuration :
385*580*355mm

P-Trap
Rough-in: 180mm

95043-00-1011

Concealed water tank

Standard Configuration :
508*100*(1050-1270)mm

SNI





1187-2/11Z-1011

Two-piece toilet

Standard Configuration :
584*584*345mm

P-Trap
Rough-in: 180mm

SNI  





95024-00-1011

Concealed water tank

Standard Configuration :
506*(165-210)*(1180-1380)mm

SNI  

11213-2-1/31Z-1011

One-piece toilet with non-electric Bidet Seat

Standard Configuration :
700*385*720mm

S-Trap
Rough-in: 305mm





11160-2-2/31Z-1

One-piece toilet

Standard Configuration :
700*415*680mm

S-Trap
Rough-in: 305mm



11213-2-1/51Z-1011

One-piece toilet with non-electric Bidet Seat

Standard Configuration :
700*385*720mm

S-Trap
Rough-in: 250mm




11160-2-2/11Z-1

Standard Configuration :
700*415*680mm

P-Trap
Rough-in: 180mm




11213-2-1/31Z-1041

One-piece toilet

Standard Configuration :
700*385*720mm

S-Trap
Rough-in: 305mm





11166-2-1/31Z-1011

One-piece toilet

Standard Configuration :
675*365*680mm

S-Trap
Rough-in: 305mm


11213-2-1/51Z-1041

One-piece toilet

Standard Configuration :
700*385*720mm

S-Trap
Rough-in: 250mm

11195-2-2/31M-1

One-piece toilet

Standard Configuration :
710*385*725mm


S-Trap
Rough-in: 305mm

Start Your Smart Life...



| LAVATORY FITTINGS



12238-1/11Z-I011
Artistic basin
Standard Configuration :
570*455*200mm




12132-1/01Z-I011
Artistic basin
Standard Configuration :
545*390*178mm




12521-1/01M-1
Artistic basin
Standard Configuration :
375*360*112mm



12161-1/01P-I011
Artistic basin
Standard Configuration :
480*370*135mm



12522-1/01M-1
Artistic basin
Standard Configuration :
415*415*125 mm



12482-1/11M-1
Above counter basin
Standard Configuration :
688*475*195mm



12133-1/01Z-1
Artistic basin
Standard Configuration :
600*385*195mm



12141-1/11Z-1
Above counter basin
Standard Configuration :
600*500*217mm




12136-1/11Z-1
Artistic basin
Standard Configuration :
500*430*206mm




12409-1/11Z-I011
Above counter basin
Standard Configuration :
600*480*175mm


| CABINET FITTINGS




A2264-1480-1
Floor-standing bathroom cabinet
Standard Configuration :
800*520*1850mm




A1248-112V-1
Floor-standing bathroom cabinet
Standard Configuration :
800*500*1840mm




A2247-117S-1
Wall-hung bathroom cabinet
Standard Configuration :
800*550*1900mm



A1246-011K-2
Floor-standing bathroom cabinet
Standard Configuration :
1000*600*1900mm



A2260-149J-1
Wall-hung bathroom cabinet
Standard Configuration :
800*520*1900mm



A1181-011B-2
Floor-standing bathroom cabinet
Standard Configuration :
1000*520*1950mm




| FAUCET FITTINGS




32134-122/1C1-Z
Basin faucet
Total height: 149mm
Height of outlet hole: 76mm
Distance from water outlet center to body: 105mm
Width hole for lifting rod



32138-122/1C1-Z
lavatory faucet
Total height: 312.4 mm
Height of outlet hole: 239.4mm
Distance from water outlet center to body: 105mm



32135-122/1C1-Z
Basin mixer
Height of outlet hole: 53mm
Distance from water outlet center to body: 108mm
Installation hole spacing: 102mm
Total height: 123mm



35109-122/1C-1
Shower mixer
Inlet spacing: 150mm
Distance between wall & outlet: 44mm
External thread: G1/2




32157-147/1C1-Z
lavatory faucet
Total height: 317mm
Height of outlet hole: 238mm
Distance from water outlet center to body: 133mm



32151-147/1C1-Z
lavatory faucet
Total height: 143mm
Height of outlet hole: 63mm
Distance from water outlet center to body: 113mm



02036-00-1011
Basin mixer + Drainer
Total height: 172mm
Height of outlet hole: 92mm
Distance from water outlet center to body: 109mm



35127-147/1C-1
Shower mixer
Inlet spacing: 150mm
Distance between wall & outlet: 55.5mm
External thread: G1/2





SHOWER SYSTEMS



Shower Room




29029-214/1A-1011
Thermostat shower mixer

Center distance of water inlet: 150mm
Distance between wall & outlet: 213mm
External thread: G1/2



26101-377/1A-1
Thermostatic shower

Center distance of water inlet: 150mm
External thread: G1/2B
Inlet hole to the highest point: 1133mm
Inlet hole to shower end face: 1023mm
head shower: 14 inches
hand shower: 5 inches

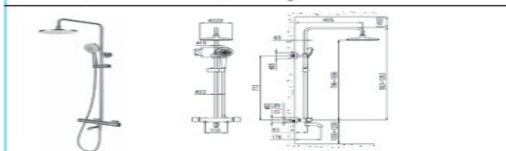


26140-533/1B-1
Thermostatic shower

Center distance of water inlet: 150mm
External thread: G1/2B
Diameter of decorative cover: 60mm
Vertical distance between water inlet and the top: 950-1250mm
Vertical distance between inlet and shower: 800-1100mm
Distance between wall and shower: 455mm




3644-093/1B1-1
Shower set

Center distance of water inlet: 150mm
External thread: G1/2B
Diameter of decorative cover: 60mm
Vertical distance between water inlet and mounting base: 781mm
Vertical distance between water inlet and the top: 950-1150mm
Distance between inlet and shower faceplate: 900-1100mm
Distance between wall and shower: 455mm

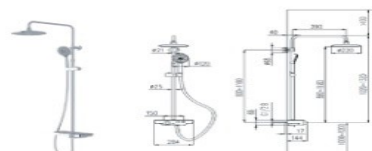


36385-434/1B1-1
Shower set

Center distance of water inlet: 150mm
External thread: G1/2B
Vertical distance between water inlet and mounting base: 800-1100mm
Vertical distance between water inlet and the top: 1020-1320mm
Vertical distance between inlet and shower: 880-1180mm

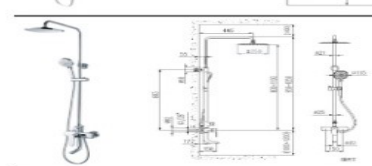


36290-277/1B-1
Shower set

SU5304 Air-intake Raincan: 10"10
Hand shower: 4.5"4 inches
Center distance of water inlet: 150mm
External thread: G1/2
Diameter of decorative cover: 60mm
Vertical distance between inlet and floor: 900-1200mm
Vertical distance between water inlet and mounting base: 878-1223mm

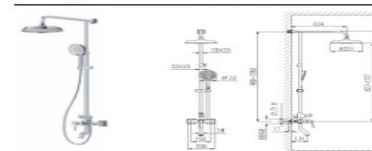

36387-382/1A-1
Shower set

Center distance of water inlet: 150mm
External thread: G1/2
Vertical distance between inlet and the top: 990-1200mm
Vertical distance between water inlet and mounting base: 980-1280mm
Vertical distance between inlet and raincan: 827-1127mm
Head shower: 10 inches
Hand shower: 5 inches

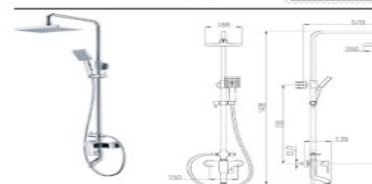

3635-056/1B1-1
Shower set

Raincan: 10"7.4 inches
Handshower: 4"3 inches single-function
Center distance of water inlet: 145±15mm
External thread: G1/2
Vertical distance between inlet and the top: 920-1220mm
Vertical distance between water inlet and mounting base: 720mm
Vertical distance between inlet and raincan: 780-1080mm
φ22 copper straight tube, φ19 bending tube




Start Your Smart Life...

08


Building Invention Limited




| JOMOO BATHTUB FITTINGS




Y03310A-1A01-1
Massage bathtub

2000*900*620mm




Y037215-1A01-1
Five sets of bathtub

1500*700*600mm




Y064116-1A01-1
Massage bathtub

1600*1600*600mm




Y037216-1A01-1
Five sets of bathtub

1600*750*600mm




Y072213-1A01-1
Free-standing bathtub

1350*695*780mm




Y037217-1A01-1
Five sets of bathtub

1700*850*600mm



Y035117-2A11-1
Massage bathtub

1700*850*600mm



Y028215-1A11-1
Five sets of bathtub

1500*700*600mm





| HARDWARE FITTINGS




51E1220-21-CJM1
Sensor basin faucet
175*72*135mm
Temperature-adjustable
DC power

15



51E1160-11-CJM1
Sensor basin faucet
175*52*135mm
DC power

15



51E1150-11-CJM1
Sensor basin faucet
156*52*125mm
DC power

15




51E1210-11-CJM1
Sensor basin faucet
33*340*445mm
DC power

15



52E2025-11-CJM1
Urinal sensor flushing device
130*130mm
Infrared sensing
Optional sensor/manual
control
DC power

15 16



52E2023-11-CJM2
Urinal sensor flushing device
130*130mm
Infrared sensing
DC power

15



5211-1B1-1
Urinal sensor flushing device
130*130mm
Infrared sensing
DC power

15



52E2010-12-CJM1
Urinal sensor flushing device
74*64*128mm
Infrared sensing
DC power

15 16

Start Your Smart Life...

10



Building Invention Limited

| COMMERCIAL USE




J13038-1/115-I011
Wall-hung sensor urinal

385*425*840mm
Water inlet: back
P-trap
DC power

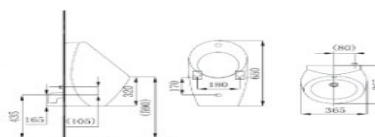


J13043-1/31Z-1
Wall-hung sensor urinal

365*365*650mm
Water inlet: back
P-trap
DC power




J13038-2/21S-1
Wall-hung sensor urinal

385*425*840mm
Water inlet: back
S-trap
DC power

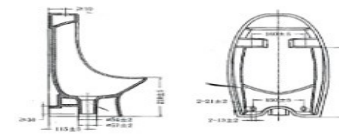


13046-0-1Z/51Z-1
Wall-hung urinal

290*350*545mm
Water inlet: top
P-trap/S-trap




J13042-1/41Z-1
Wall-hung sensor urinal

480*365*795mm
Water inlet: back
P-trap
DC power

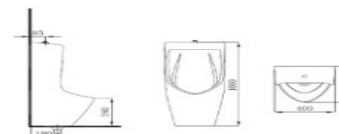


13037-1/21Z-I011
Floor-standing urinal

400*430*1000mm
Water inlet: top
S-trap



J13042-2/41Z-1
Wall-hung sensor urinal

480*365*795mm
Water inlet: back
S-trap
DC power




13042-1Z/41Z-I011
Floor-standing urinal

480*360*710mm
Water inlet: back
S-trap






| KITECHEN USE

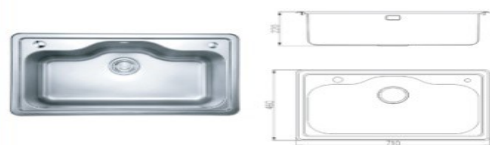


06073-8Z-I011
Stainless steel sink

Product specification:
710*460*220(1.0 mm)
Install hole size: 685*435*4 - R30

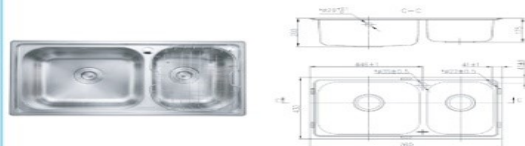

06108-7Z-4
Stainless steel sink

760*430*200mm(thickness: 0.7mm)
Install hole size: 740*410-4-R25




0617-8Z-I011
Stainless steel sink

748*435*195(thickness: 1.0mm)
Install hole size: 718*405*4-R30



06116-7Z-2
Stainless steel sink

φ410*180mm
Install hole size: 410mm

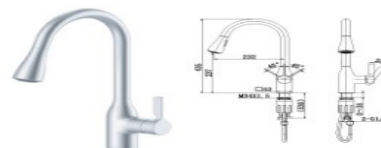

33138-123/1B-Z
Vertical kitchen faucet

Height of outlet hole: 237mm
Distance from water Outlet center to body: 232mm
Total height: 435mm



3336-146/1B1-Z
Vertical kitchen faucet

Height of outlet hole: 253mm
Distance from water outlet center to body: 222mm
Total Height: 377mm



23009-231/1B-I011
Vertical kitchen faucet

Height of outlet hole: 164.5mm
Distance from water outlet center to body: 166.5mm
Total height: 301.5mm
External thread: G1/2



33080-473/1B-I01Z
Vertical kitchen faucet

Height of outlet hole: 229mm
Distance from water outlet center to body: 198mm
Total height: 300mm
thread: M32*1.5



Start Your Smart Life...

12


Building Invention Limited

| QUICK OPEN FAUCET



7101-238/1C-I011 Quick-open faucet

Inlet thread: G1/2
Total length: 97mm
Distance between wall & outlet: 85mm
Total height: 81mm

U X



7104-238/1C1-I011 Quick-open faucet

Inlet thread: G1/2
Total length: 114mm
Distance between wall & outlet: 102mm
Total height: 81mm

U X



7203-238/1C1-I011 Quick-open washing machine faucet

Inlet thread: G1/2
Total length: 82mm
Distance between wall & outlet: 69mm
Total height: 111mm

U X



7116-183/1C-I011 Quick-open faucet

Inlet thread: G1/2

U X



7103-238/1C1-I011 Quick-open faucet

Inlet thread: G3/4
Total length: 88mm
Distance between wall & outlet: 73mm
Total height: 84mm

U X



7301-238/1C1-I011 Quick-open faucet

Inlet thread: G1/2
OD of flange: $\varnothing 50$
Distance between wall & outlet: 63

U X



7801-049/1C-I011 Quick-open faucet

Inlet thread: G1/2
Total length: 123mm
Distance between wall & outlet: 111mm
Total height: 81mm
Distance between connector & outlet: 75mm
Connect pipe for washing machine: $\varnothing 15.5$

U X



7104-183/1C-I012 Quick-open faucet

Inlet thread: G1/2

U X



I STAINLESS STEEL ACCESSORIES



934811-1D-I011
Toilet brush holder
114*152*400mm
Material: zinc alloy

①



934812-1D-I011
Towel rack
595*207*83mm
Material: zinc alloy

①



S27021-2B01-1
Bidet sprayer
Inlet thread G1/2
Hose length: 1.2m
Material: ABS



02303-1C-I011
Bidet sprayer
Inlet thread: G1/2
Hose length: 1.2m
Material: #BBS



939426-1B-I011
Six-piece Accessory
hook: 70*56*50mm
single cup-holder: 109*97*96mm
soap holder: 128*117*53mm
towel ring: 196*64*160mm
paper holder: 150*61*130mm
single pole: 624*69*50mm
Material: zinc alloy

①



933613-1D-I011
Movable towel rack
610*240*163mm
Material: zinc alloy

①



H2101-120103C-I011
Stainless steel double interlocked shower hose
φ14*1200mm
thread: G1/2

① ②



H2101-150703C-I011
Stainless steel double interlocked shower hose
φ14*1500mm
thread: G1/2

① ②



933612-1D-I011
Towel rack
609*228*139mm
Material: zinc alloy

①



933611-1D-I011
Stainless steel Toilet brush holder
146*119*355mm
Material: zinc alloy

①



91171-1B-1
Hole-spill drainer
Diameter of pipe: Φ32mm
Total length of pipe: 180mm

①



91084-1B-1
Pop-up drainer
Φ68mmX190mm

① ② ③ ④ ⑤



933610-1D-I011
Dresser
530*153*56mm
Material: zinc alloy

①



933609-1D-I011
Double-bar
624*123*50mm
Material: zinc alloy

①



9120-1C1-I011
Drain pipe long for basin
Pipe diameter: Φ32mm
Distance between wall & inlet: 310mm
Material: copper alloy

①



9107-1C-I011
Urinal drain pipe
Pipe diameter: Φ32mm
OD of flange: Φ65mm
Distance between wall & inlet: 240mm
Material: copper alloy

①




About

Merih was founded in 1977 and has been a leading producer of automatic door, cabin and complete elevator systems with more than 40 years of experience. With the integration of the latest technology, Merih aims to fulfill the requirements of modern cities and vertical buildings while adopting customer satisfaction as a principle. Alongside Merih Elevator's expert production, administrative and sales team, the R&D Center produces innovative projects according to EN 81-20/50 and 81-58 International standards. Within its 30,000m2 production facility, Merih has the capacity to produce 100,000 pieces of automatic doors and 5,000 cabins, shaft equipment, machine motor, control panel, and other productions while being a 100% national company. Producing the highest quality of products that are manufactured in Turkey with 100% domestic good standards. Today, exporting to more than 65 countries, Merih exemplarily represents the Turkish production industry in its own sector. Merih stands beside its customers with qualified human resources, strong infrastructure, visionary, perspective and solution-oriented attitude for every step of sales and after-sales procedures.

The product application

Beethoven



Kaplama | Coating
Satin Paslanmaz
Hairline Stainless Steel
Tavan | Ceiling
CL 027

Taban | Floor
BS 014 - Granit | Granite
Aksesuar | Accessories
DC 013 Dekoratif Paslanmaz
Decorative Stainless Steel
Zemin ve aksesuarlar opsiyoneldir.
Opzyon sepevlerimiz EN 81-20/50
standartlarına uygundur.
Floor and accessories are optional.
All options are in compliance with
EN 81-20/50

Pisagor



Pisasso



Kaplama | Coating
Satin Paslanmaz
Hairline Stainless Steel
Tavan | Ceiling
CL 052

Taban | Floor
BS 008 - Granit | Granite
Aksesuar | Accessories
DC 013 Dekoratif Paslanmaz
Decorative Stainless Steel
Zemin ve aksesuarlar opsiyoneldir.
Opzyon sepevlerimiz EN 81-20/50
standartlarına uygundur.
Floor and accessories are optional.
All options are in compliance with
EN 81-20/50

Balzac



Cabin View



Passenger elevator



Panoramic elevator



Medical service elevator



Cargo elevator



Car elevator



Door



Cam Kapi



Lale



Bahar



Kiz Kulesi




Osmanli




escalator moving sidewalk



CEILING

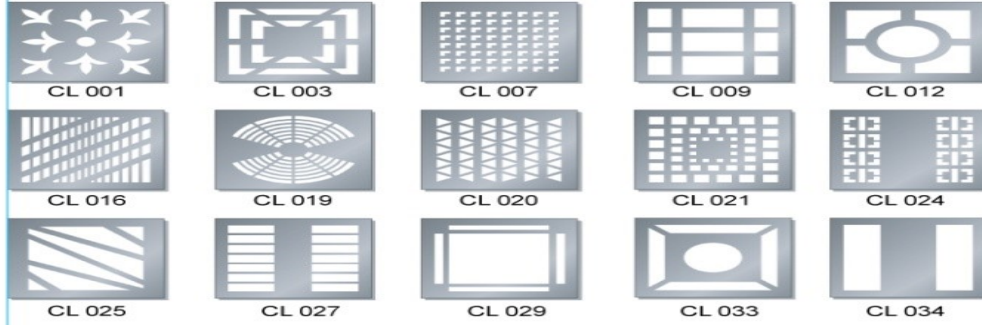

Landig Operations Panel




Car Operations Panel




Horizontal Operations Panel




LANDING OPERATIONS PANEL

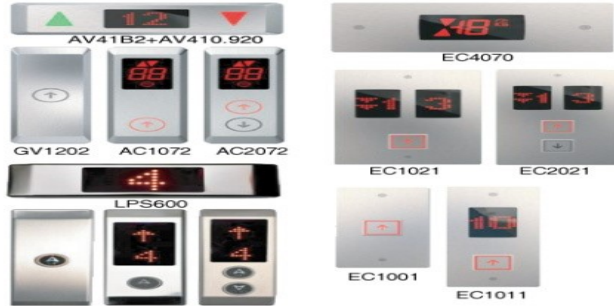

FLOOR

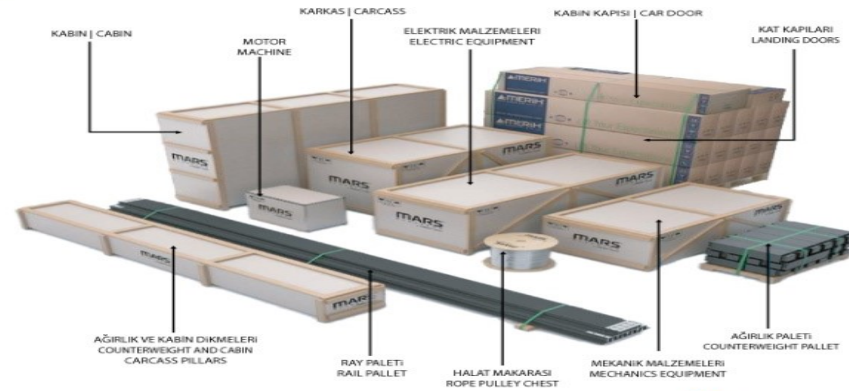

COMPONENTS



Cabin Configurator

KAPASITE/Q-Load (kg)		300	375	450	450	750	1000	1275	1600	2000	2500	3000	3500	4000	5000	
KİŞİ/PERSONS		4	5	6	8	10	13	17	21	27	33	40	47	53	67	
ALAN/AREA (M2)		0,90	1,10	1,20	1,54	1,89	2,24	2,80	3,36	4,00	4,86	4,70	6,30	7,20	8,75	
ÖLÇÜLER / DIMENSIONS	W		900	1000	1000	1000	1000	1400	2000	2100	2350	1800	1900	2100	2400	2500
	D		1000	1100	1200	1400	1400	1600	1400	1600	1700	2700	3000	3000	3000	3500
	H	İÇ/INTERN	2200	2200	2200	2200	2200	2200	2300	2300	2300	2300	2300	2300	2300	2300
		DIŞ/EXTERN	2440	2440	2440	2440	2440	2440	2440	2540	2540	2540	2540	2540	2540	2540
KAPI YUKSEKLİĞİ/DOOR HEIGHT		2000	2000	2000	2000	2000	2000	2100	2100	2100	2200	2200	2200	2200	2200	

Technical Specifications of Elevator

Capacity (kg)	Speed (m/s)	Door opening size OPxOH	Car size CWxCDxCH	Shaft size SWxSD	Pit depth (mm)	Overhead height (mm)	Machine room height (mm)
450	1.0	800*2100	1100*1000*2600	1700*1700	≥ 1500	≥ 4300	≥ 2200
	1.5				≥ 1600	≥ 4400	
600	1.0	800*2100	1300*1200*2600	1900*1850	≥ 1500	≥ 4300	≥ 2200
	1.5				≥ 1600	≥ 4400	
750	1.0	800*2100	1400*1350*2600	2000*2000	≥ 1500	≥ 4300	≥ 2200
	1.5				≥ 1600	≥ 4400	
1000	1.0	900*2100	1600*1450*2600	2250*2150	≥ 1500	≥ 4300	≥ 2200
	1.5				≥ 1600	≥ 4400	
1275	1.0	1000*2100	1850*1500*2600	2500*2200	≥ 1500	≥ 4300	≥ 2200
	1.5				≥ 1600	≥ 4400	
1600	1.0	1100*2100	1900*1800*2600	2550*2500	≥ 1500	≥ 4300	≥ 2200
	1.5				≥ 1600	≥ 4400	

Medical Service Elevator Specifications

Capacity (kg)	Speed (m/s)	Door opening size OPxOH	Car size CWxCDxCH	Shaft size SWxSD	Pit depth (mm)	Overhead height (mm)	Machine room height (mm)
1600	1.0	1200*2100	1400*2400*2600	2300*3000	≥ 1500	≥ 4300	≥ 2200
	1.5				≥ 1600	≥ 4400	≥ 2200

Cargo Elevator Specifications

Capacity (kg)	Speed (m/s)	Door opening size OPxOH	Car size CWxCDxCH	Shaft size SWxSD	Pit depth (mm)	Overhead height (mm)	Machine room height (mm)
2000	0.5	1600*2100	1900*2100*2200	2850*2700	≥ 1500	≥ 4200	≥ 2200
3000	0.5	1700*2100	2200*2500*2200	3350*3100	≥ 1500	≥ 4200	≥ 2300
5000	0.5	2000*2100	2700*3200*2200	3850*3800	≥ 1160	≥ 4200	≥ 2500
8000	0.3	2000*2100	2700*5000*2200	3850*5600	≥ 1700	≥ 4800	≥ 2600

HYH Hardware Product Range




Door Handle Series




Door Hardware Series



Cabinet Handle Series

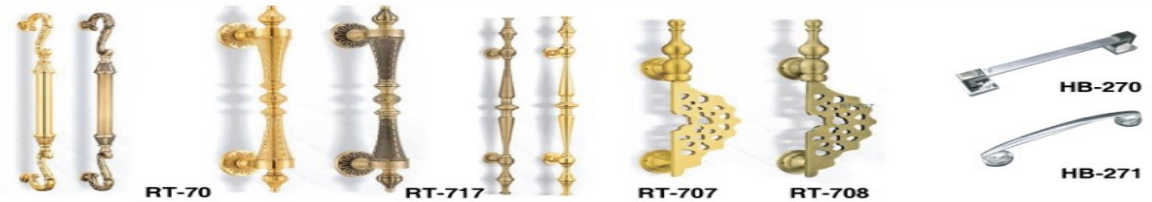

Bathroom Accessories Series

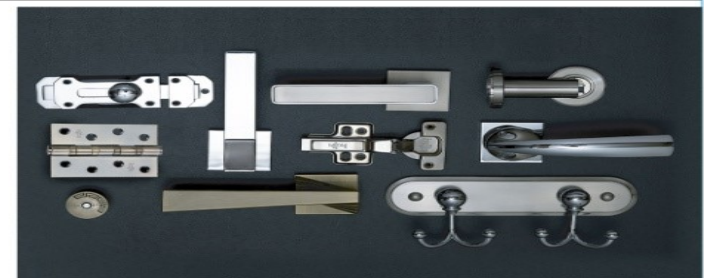



DESIGN & INNOVATION AWARDS



reddot design award



JOMOO Won **15** if
and **12** Red Dot Design Awards



reddot design award




GERMAN INNOVATION AWARD



GOOD DESIGN

JOMOO Won **39** if
29 Red Dot Design Awards
5 German Design Awards
3 Good Design Awards
2 Good Innovation Awards
2 German Iconic Awards

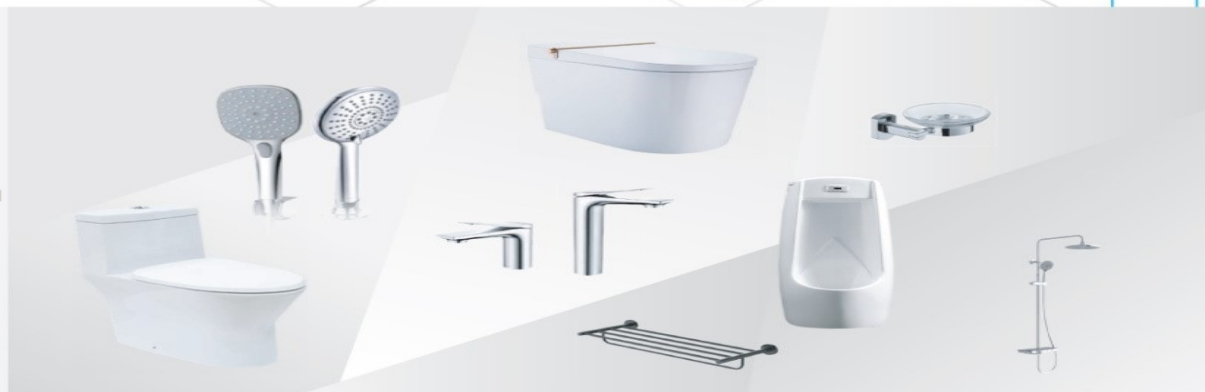

Building Invention Limited
a concern of Electromech Engineering

Corporate Office & Showroom :
Road - 1, House - 4 (2nd Floor)
Nikunja - 2, Khilkhet, Dhaka-1229, Bangladesh.
Phone: +88 02 9337390, Mobile : +88 15523 48877
Email : tradesales@electromecheng.com

Chottogram Office :
1192/A, 2 No, Gate Masjid Lane
East Nasirabad, Panchlaish, Chattagram.
Phone : 031 2557299, Mobile : +88 1770 616518
www.electromecheng.com